


2030 ES



SPECIFICATIONS

Electric Scissor Lift

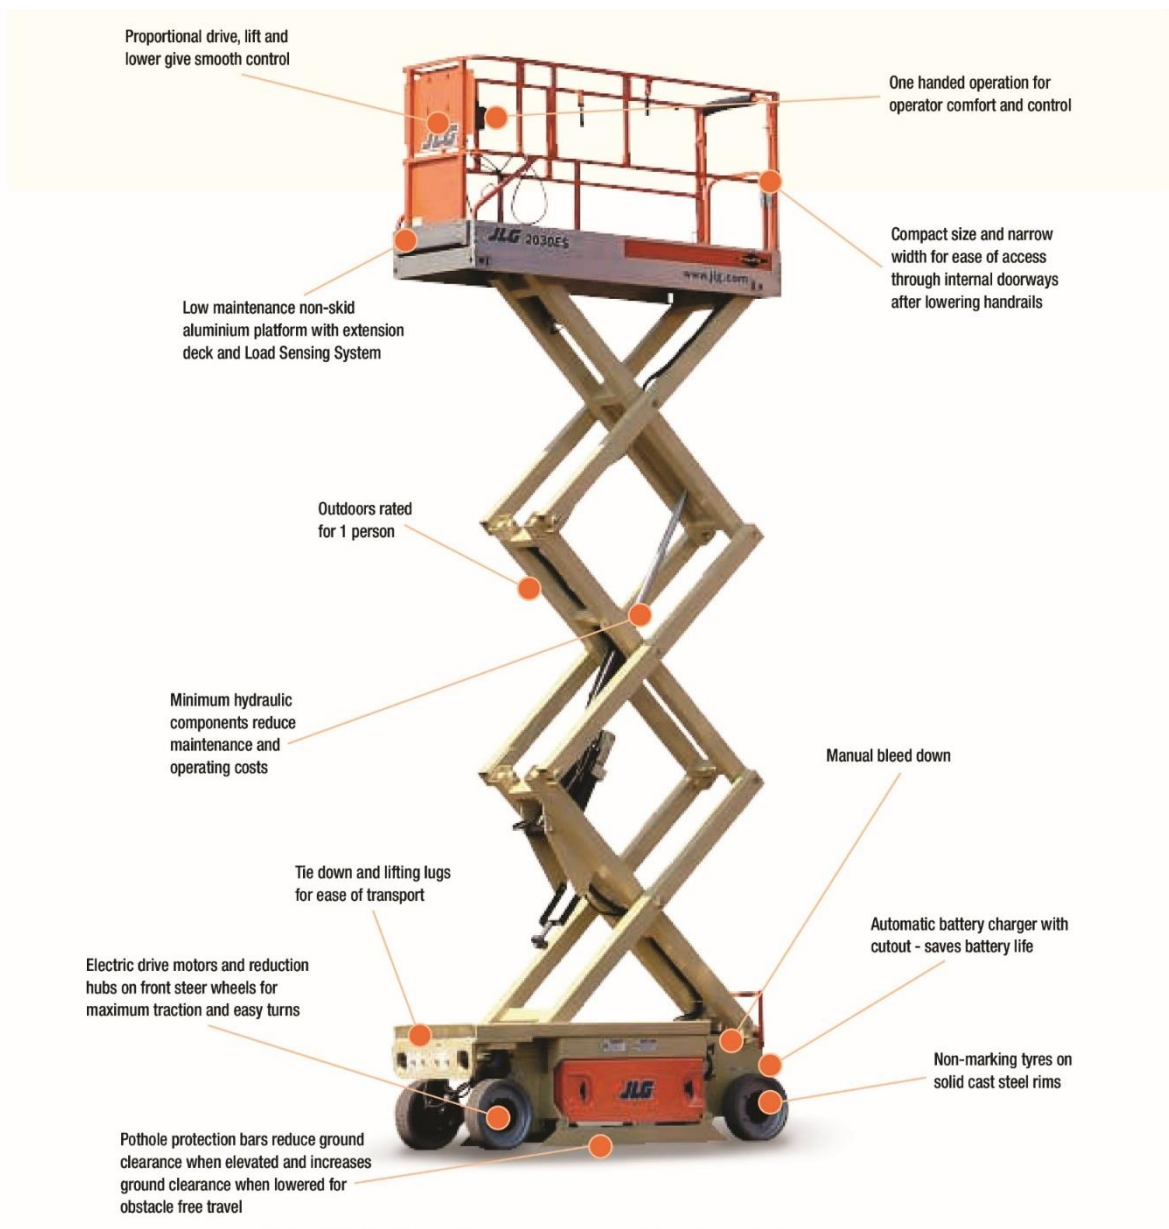



SPECIFICATIONS

2030 ES

QUESTIONS TO ASK

- What is the floor loading in the work area?
- Do you want to work multiple shifts?
- Do you need to move up and down ramps?
- Do you need to enter narrow doors?
- Do you need an extension lead outlet in the platform?
- Are you working in a food or clean environment and can't have oil fumes?

KEY SELLING POINTS

- Smooth control, proportional drive, lift and lower
- Long battery duty cycles, drive at full elevation for 18 hours
- 76cm wide chassis allows drive through a standard 81cm door
- Fold-down rails allows drive through standard 203cm door
- Extension platform has fold-down rails
- Non-marking solid tyres with tight turning circle, zero inside turning radius
- Constant traction control with quiet electric front wheel drive for 25 per cent gradeability
- Removable/Interchangeable control box with all other ES scissors
- Weatherproof Inverter style battery charger, can use long extension lead. Ideal for multi shift applications
- Wide scissor stack provides rigidity and stability
- Pothole protection prevents elevated drive
- Multi axis 3 degree level sensor with a lateral slope range of 3 degree at base to 2 degree fully elevated
- Diagnostic Battery Meter at base or JLG analyser indicates system functions for servicing and adjustment

APPLICATIONS

- Facilities maintenance
- Shopping centres and other indoor/outdoor areas.
- Manufacturing and warehouse applications and stock-takes
- Telecommunications facilities
- Entertainment facilities
- Electricians
- Plumbers
- All maintenance and construction work
- Outdoors rated 1 person

SPECIFICATIONS

Performance:

Platform Height (max.)	6.10m
Working Height	8.10m
Lift Time	30 sec
Lower Time	30 sec
Platform Capacity Standard	360kg

Dimensions:

Stowed Height - Rails Up	2.20m
Stowed Height - Rails Lowered	1.82m
Minimum Transport Length	2.30m
Minimum Transport Height	1.82m
Overall Width	0.76m
Wheelbase	1.88m
Ground Clearance	0.09m
Platform Width	0.76m
Platform Length	2.30m
Standard Platform Extension	0.90m
Platform Height Lowered	1.10m
Maximum Drive Height	6.10m

Power:

Power Source	Battery
DC Voltage	24V
DC Power	225 Amp h
Hydraulic Pump - Type	Gear
Batteries	4 x 6V
Charger Electronic IP46 Input Voltage	190-250V AC

Travel:

Tyre Size	406 x 125
Tyre Type	Solid/Non-marking
Inside Turn Radius	0m
Outside Turn Radius	2.06m
Drive Speed Elevated	0.8km/h
Gradeability	25%
Indoor Rating Person on Platform	2
Outdoor Rating 12.5m/sec Persons on Platform	1
Elevated Drive Time	18 hr

Weights and Capabilities:

Hydraulic Tank Capacity	4.73 Ltr
Operating Weight	2,065kg